

MP-3 Sump/Effluent Pump

Features

- Piggy-back switch design. Pump can be operated manually by overriding the switch.
- High efficient motor with upper and lower ball bearings. Runs cooler and lasts longer.
- Vortex impeller, helps prevent clogging.
- Sealed entry replaceable power cord. Easy to replace in the field. Prevents water from entering motor housing in the event of a cut power cord.

Applications

- Basements, Dewatering, Septic Systems, Decorative ponds




Specifications

Discharge	1 1/2" NPT. Vertical
Solids	1/4"
Liquid Temperature	60° C (Intermittent) 25° C (Continuous)
Motor Housing	Cast Iron
Volute	Cast Iron
Seal Plate	Cast Iron
Impeller	Nylon +30% Fiberglass
Shaft	Nickel Plated Steel
Shaft Seal	Carbon - Ceramic, John Crane Type 21
Bearing (Upper & Lower)	Single Row, Ball, Lubricated
Hardware	300 Series, Stainless Steel
Square Rings	Buna-N
Cord Entry	Compression Grommet - Outer Jacket Seal Quick disconnect pin terminals
Motor (Single Phase)	1/3 HP, 1750 RPM, 60Hz, Oil Filled NEMA L includes motor overload protection Permanent split capacitor
Capacity	Up to 43 GPM
Shut Off Head	20 Ft.
Minimum Head	5 Ft.





MP-3 Sump/Effluent Pump

Performance

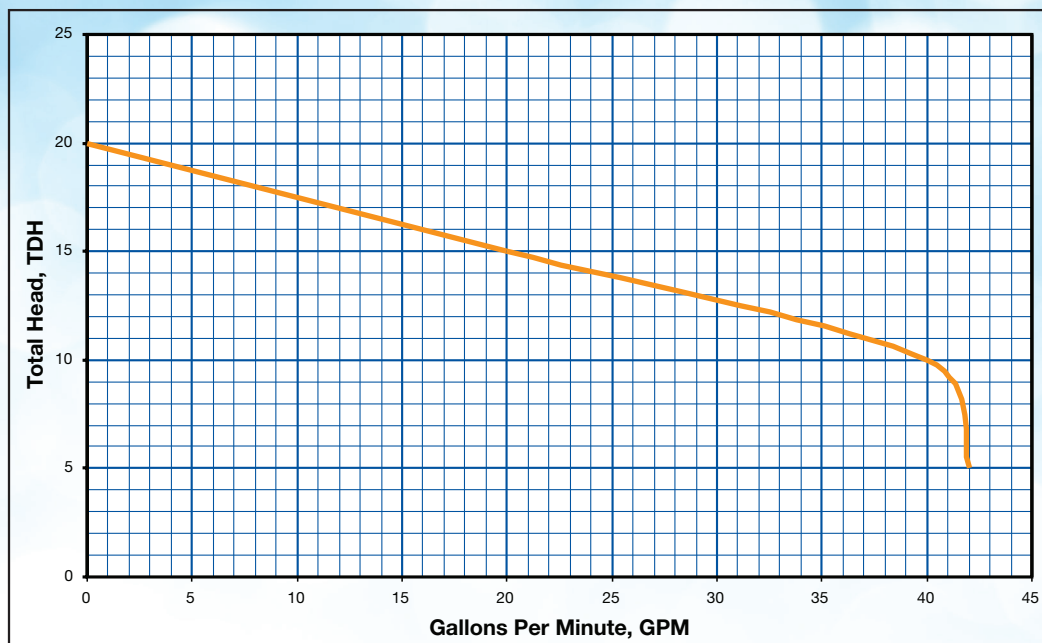

Dimensions

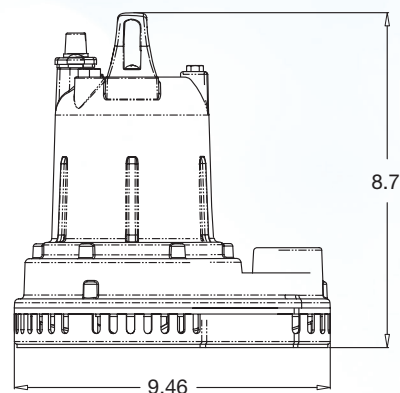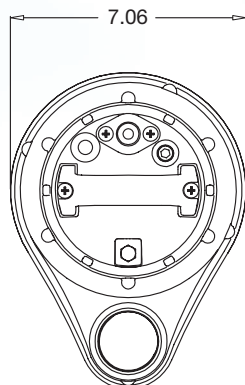

Model	HP	Volts	Phase	Amps	Cord Length	Switch	Weight
MP-3-11	1/3	115	1	5	10'	Manual	24 Lbs
MP-3-11V	1/3	115	1	5	10'	Float	25 Lbs
MP-3-11A	1/3	115	1	5	10'	Float	25 Lbs

